

**HARDICAGE //**  
**CANTILEVERED**  
**LOADING CAGE**



## KEY FEATURES

The HardiCage is the latest innovation from Hardiquip designed to facilitate the pre-loading of construction materials at the point of manufacture prior to delivery to site.

Used in conjunction with the Hardideck platform system, the pre-loaded HardiCage is lifted by crane direct from transport to the required floor level whereupon it is simply attached to the Hardideck Inboard for unloading releasing the crane for other lifting duties.

## BENEFITS

- Eliminates double handling of materials on site
- Vastly increases crane productivity
- Eliminates accidental damage to materials during offloading and lifting
- Eliminates complex slinging methods for different construction materials
- Eliminates on-site storage of materials
- Vastly increases logistics efficiency for material deliveries to site.



## HARDICAGE //

CANTILEVERED LOADING CAGE TO FACILITATE THE LOADING AND UNLOADING OF MATERIALS ON MULTI-STORY BUILDING SITES.

## TECHNICAL SPECIFICATIONS



**2000**

SWL



**800**

Self weight




**1950**

Cage width



**3600**

Cage length

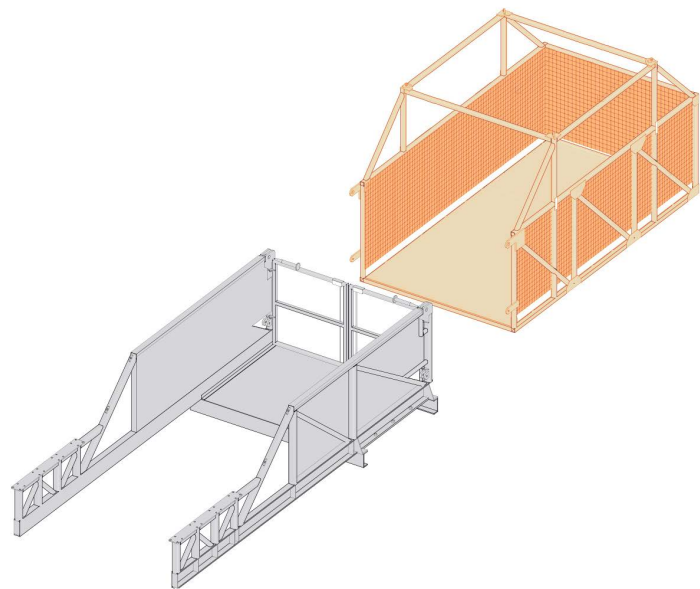

### BRISBANE

Chris Hardiman  
0401 811 295  
chris@hardiquip.com

### ADMIN

Pete Hardiman  
0417 422 941  
pete@hardiquip.com

### SYDNEY

Andy Walker  
0427 446 650  
andy@hardiquip.com

### LONDON & UK

Jason Sudborough  
+44 7496 568 020  
jason@samsonequipment.co.uk